




Harp sluiting type G-4161 borstbout (Grade 6)



Veiligheidsfactor 6. Gegalvaniseerd staal met een hoge treksterkte geschikt voor temperaturen tussen -20°C en +200°C. Voorzien van borstbout. Volgens EN 13889.

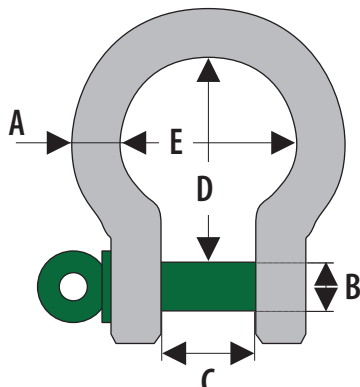


Type	Veilige werklust (kg)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Gewicht (kg/st/m)	Artikelnummer
G4161-1/4	500	7	8	12	29	20	0.06	3011001
G4161-5/16	750	9	10	13.5	32	21	0.11	3011003
G4161-3/8	1000	10	11	16.1	36	26	0.15	3011005
G4161-7/16	1500	11	13	18	43	29	0.21	3011007
G4161-1/2	2000	13,5	16	22	51	32	0.37	3011009
G4161-5/8	3250	16	19	27	64	43	0.65	3011011
G4161-3/4	4750	19	22	31	76	51	1.06	3011013
G4161-7/8	6500	22	25	36	83	58	1.56	3011015
G4161-1	8500	25	28	43	95	68	2.32	3011017
G4161-1.1/8	9500	28	32	47	108	75	3.28	3011018
G4161-1.1/4	12000	32	35	51	115	83	4.51	3011019
G4161-1.3/8	13500	35	38	57	133	92	5.93	3011020
G4161-1.1/2	17000	38	42	60	146	99	7.89	3011021
G4161-3/4	25000	45	50	74	178	126	13.4	3011023
G4161-2	35000	50	57	83	197	138	18.15	3011025
G4161-2.1/4	42500	57	65	95	222	160	26.29	3011027
G4161-2.1/2	55000	65	70	105	260	180	37.6	3011029

Harpsluiting type G-4163 moer-bout-splitpen (Grade 6)



Veiligheidsfactor 6. Gegalvaniseerd staal met een hoge treksterkte geschikt voor temperaturen tussen -20°C en +200°C. Voorzien van moer-bout-splitpen. Volgens EN 13889.

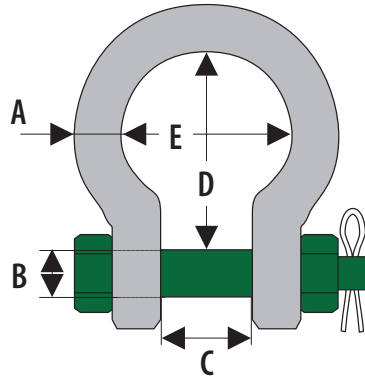


Type	Veilige werklust (kg)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Gewicht (kg/st/m)	Artikelnummer
G4163-1/4	500	7	8	12	29	20	0.06	3012001
G4163-5/16	750	9	10	13.5	32	21	0.11	3012003
G4163-3/8	1000	10	11	16.1	36	26	0.16	3012005
G4163-7/16	1500	11	13	18	43	29	0.22	3012007
G4163-1/2	2000	13.5	16	22	51	32	0.42	3012009
G4163-5/8	3250	16	19	27	64	43	0.74	3012011
G4163-3/4	4750	19	22	31	76	51	1.18	3012013
G4163-7/8	6500	22	25	36	83	58	1.77	3012015
G4163-1	8500	25	28	43	95	68	2.58	3012017
G4163-1.1/8	9500	28	32	47	108	75	3.66	3012018
G4163-1.1/4	12000	32	35	51	115	83	4.91	3012019
G4163-1.3/8	13500	35	38	57	133	92	6.54	3012020
G4163-1.1/2	17000	38	42	60	146	99	8.19	3012021
G4163-1.3/4	25000	45	50	74	178	126	14.22	3012023
G4163-2	35000	50	57	83	197	138	19.85	3012025
G4163-2.1/4	42500	57	65	95	222	160	28.33	3012027
G4163-2.1/2	55000	65	70	105	260	180	39.60	3012029

D-sluiting type G-4151 borstbout (Grade 6)




Veiligheidsfactor 6. Gegalvaniseerd staal met een hoge treksterkte geschikt voor temperaturen tussen -20°C en +200°C. Voorzien van borstbout. Volgens EN 13889.

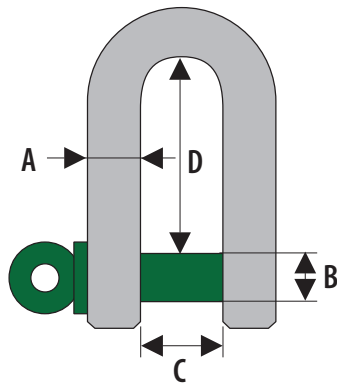

Type	Veilige werklust (kg)	A (mm)	B (mm)	C (mm)	D (mm)	Gewicht (kg/st/m)	Artikelnummer
G4151-1/4	500	7	8	12	25	0.06	3013001
G4151-5/16	750	9	10	13.5	27	0.11	3013003
G4151-3/8	1000	10	11	16.1	31	0.16	3013005
G4151-7/16	1500	11	13	18	37	0.21	3013007
G4151-1/2	2000	13,5	16	22	43	0.37	3013009
G4151-5/8	3250	16	19	27	51	0.65	3013011
G4151-3/4	4750	19	22	31	59	1.06	3013013
G4151-7/8	6500	22	25	36	73	1.56	3013015
G4151-1	8500	25	28	43	85	2.32	3013017
G4151-1.1/8	9500	28	32	47	90	3.28	3013019
G4151-1.1/4	12000	32	35	51	94	4.51	3013021
G4151-1.3/8	13500	35	38	57	115	5.93	3013023
G4151-1.1/2	17000	38	42	60	127	7.89	3013025
G4151-1.3/4	25000	45	50	74	149	13.4	3013027
G4151-2	35000	50	57	83	171	16.86	3013029
G4151-2.1/4	42500	57	65	95	190	24.56	3013031
G4151-2.1/2	55000	65	70	105	203	32.65	3013033

D-sluiting type G-4153 moer-bout-splitpen (Grade 6)

Veiligheidsfactor 6. Gegalvaniseerd staal met een hoge treksterkte geschikt voor temperaturen tussen -20°C en +200°C. Voorzien van moer-bout-splitpen. Volgens EN 13889.

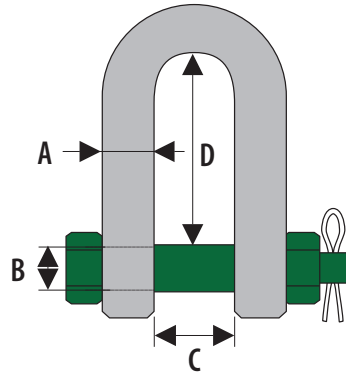


Type	Veilige werklust (kg)	A (mm)	B (mm)	C (mm)	D (mm)	Gewicht (kg/st/m)	Artikelnummer
G4153-1/2	2000	13	16	22	43	0.37	3014009
G4153-5/8	3250	16	19	27	51	0.65	3014011
G4153-3/4	4750	19	22	31	59	1.06	3014013
G4153-7/8	6500	22	25	36	73	1.56	3014015
G4153-1	8500	25	28	43	85	2.32	3014017
G4153-1.1/8	9500	28	32	47	90	3.28	3014019
G4153-1.1/4	12000	32	35	51	94	4.51	3014021
G4153-1.3/8	13500	35	38	57	115	5.93	3014023
G4153-1.1/2	17000	38	42	60	127	7.89	3014025
G4153-1.3/4	25000	45	50	74	149	13.4	3014027
G4153-2	35000	50	57	83	171	16.86	3014029
G4153-2.1/4	42500	57	65	95	190	24.56	3014031
G4153-2.1/2	55000	65	70	105	203	32.65	3014033

Ooghaak type 14A (Grade 8)



Gelegeerd staal. Veiligheidsfactor 4. Inclusief veiligheidsklep.
Volgens EN 1677-2.

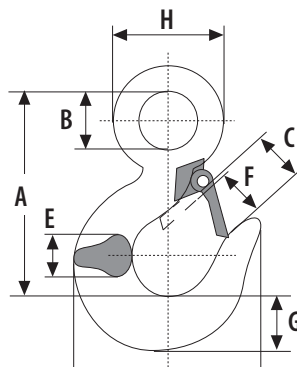


Type	Veilige werklust (kg)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Gewicht (kg/st/m)	Artikelnummer
S6714A-1.25T	1250	81	19	24	32	17	20	19	37	0.27	3007001
S6714A-1.6T	1600	91	22	26	34	19	22	22	45	0.57	3007003
S6714A-2.5T	2500	105	27	32	37	25	27	27	52	0.81	3007005
S6714A-3.2T	3200	124	32	34	40	26	30	31	62	1.27	3007007
S6714A-5.4T	5400	147	39	44	50	35	37	36	74	1.70	3007009
S6714A-8T	8000	190	50	55	60	46	48	48	96	3.60	3007011
S6714A-12.8T	12800	230	64	64	72	47	53	65	123	7.00	3007013
S6714A-16T	16000	254	70	70	84	55	60	69	139	11.0	3007015
S6714A-22T	22000	310	89	91	100	66	77	81	169	17.0	3007017

Wartelhaak type 3A (Grade 8)



Gelegeerd staal. Veiligheidsfactor 4. Inclusief veiligheidsklep.
Niet draaibaar onder last.

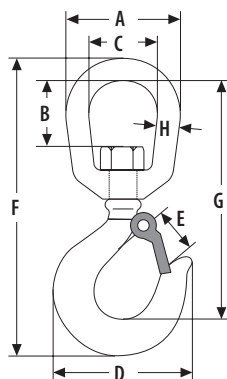

Type	Veilige werklust (kg)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Gewicht (kg/st/m)	Artikelnummer
S6703A-1.25T	1250	52	28	31	75	20	148	118	11	0.49	3009001
S6703A-1.6T	1600	67	35	40	81	22	180	145	14	0.95	3009003
S6703A-2.5T	2500	81	43	47	92	27	208	167	17	1.48	3009005
S6703A-3.2T	3200	81	47	47	103	30	222	180	17	1.79	3009007
S6703A-5.4T	5400	106	64	64	125	37	274	217	21	3.80	3009009
S6703A-8T	8000	129	69	78	165	49	337	276	26	7.4	3009011
S6703A-11.5T	11500	148	68	82	193	53	395	310	22	14.9	3009013
S6703A-16T	16000	165	84	92	221	58	445	352	24	15.0	3009015
S6703A-22T	22000	200	107	115	282	87	543	434	29	27.0	3009016